

Form-In-Place Sealing Foam Gasket F6011



Description

The F6011 is a water and environmental seal Form-In-Place silicone foam gasket. This product is designed as a non-electrically conductive option with the added benefits of a resilient elastic gasket and good adhesion on general plastic and metal surfaces, it is the best choice to replace conventional PU foam gasket system.


The F6011 is a heat curable silicone foaming system that is optimized for the Form-In-Place process. Leakage of silicone oil under high temperature and pressure does not occur.



Benefits

- Low surface tension, excellent waterproof ability
- Non-stick surface, flexibility and non-slip
- Dry surface, no dust accumulation concern
- Very elastic foam properties designed for a very low compression force
- Ozone and UV resistance

Compression and Deflection on F6011

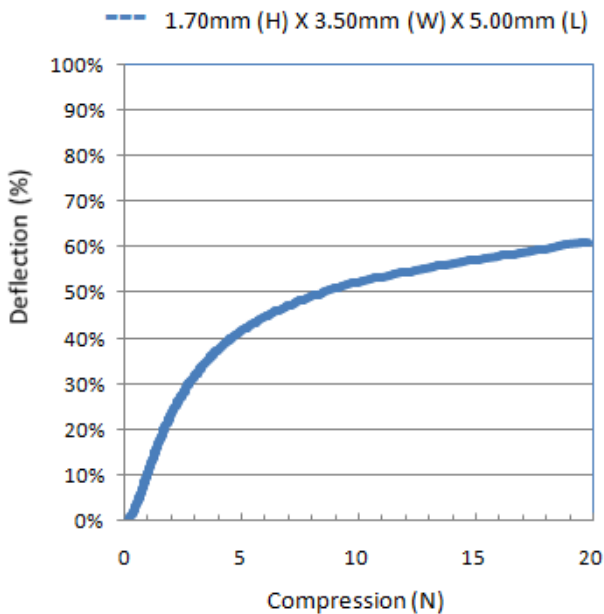

Properties	Unit	F6011
Elastomer Binder		Silicone Foam
Color		Black
Physical Properties		
Specific Gravity	g/cm ³	0.47
Hardness	Shore A	17
Curing time (@130°C)	Minutes	30
Adhesion Al metal	N/cm ²	>45
Tensile Strength	psi	>100
Elongation	%	200%
Tear Strength	N/mm	>2
Compression Set	%	30
Temperature Range	°C	-50 to 150
Maximum Using Temperature	°C	200
Electrical Properties		
Volume Resistivity	Ohm-cm	3 x 10 ¹⁵
Dielectric Strength	kV / mm	20

This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.

DATA MAX-SEAL F6011 TDS 2014 REV.A