

Conductive Form-In-Place Gasket F5381



Description

The conductive Form-In-Place fluorosilicone material F5381 contains high mechanical strength, excellent adhesion, and high EMI shielding performance in harshest corrosive environments, F5381 is the best choice for military and aerospace applications.


This material is suitable for metal or glass fabric filled plastic substrates.

The F5381 offers enhanced galvanic corrosion resistance and stability in severe environments.

Benefits

- Flexibility at low temperature
- Resistance to polar solvent, automotive fuel, oil additives (Amine), chemicals and steam
- Very low outgassing, pass NASA outgassing test
- More than 100 dB shielding effectiveness from 200 MHz to 10GHz after salt fog test and temperature cycle test
- More than 80N/cm² shear adhesion on common housing substrates and coatings

Force-Deflection-Resistance Curve of F5381 Gasket
1.0mm (H) X 1.25mm (W) X 5.00mm (L)

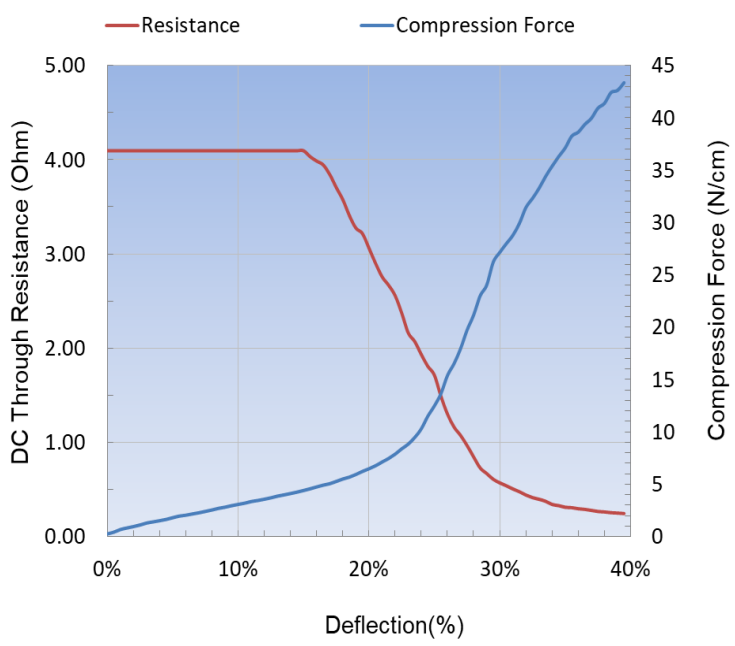

Properties	Unit	F5381
Elastomer Binder		Fluorosilicone
Conductive Filler		Ni/Graphite
Cure System		Thermal
Specific Gravity	g/cm ³	2.73
Hardness	Shore A	60
Adhesion on Al metal	N/cm ²	>80
Tensile Strength	psi	350
Elongation	%	125
Tear Strength	lbf/in	53
Compression Set	%	25%
Temperature Range	°C	-55 to150
Maximum Using Temperature	°C	200
UL Flammability Rating	UL94 V-0	E303387
Gasket Resistance 30% compression, 1mmH	Ohm	0.50
Shielding Effectiveness – 100 MHz – 10 GHz	dB	>100



This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.

DATA MAX-SHIELD F5381 TDS 2018 REV.B